



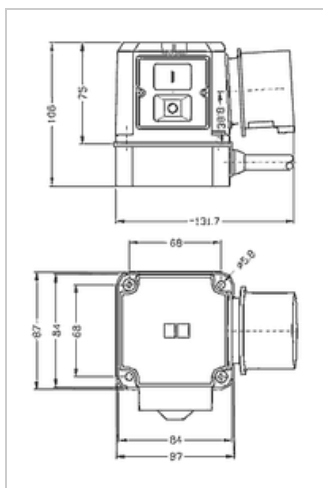

Switch-plug combination K700/ST3 up to 3 kW

Manufacturer:	Klinger & Born
Type:	K700/ST3/KA12/P
Product no.:	SSK500
Weight:	0.700



■ Details

AC switch-plug combination for circular saws, planing machines, shredders and other machines, which after power failure and power recovery are not allowed to turn back on.

■ Properties

- 2-pole switch (Contactor)
- Switching capacity up to 3 kW
- With undervoltage release
- Connection possibility for thermal contact
- Including splash water proof cover

■ Installation / connection (refer to wiring diagram)

The switch is screwed on the housing base. Grid dimension of the screws: 68 x 68 mm. The cable outlet is on the side of the housing base, by factory setting on the opposite side of the keypad. By rotating the base, the cable can be routed out of all 4 sides.

The brown wire is the connection for the thermal contact. If the motor does not have a thermal contact, the brown wire has to be connected together with the grey wire on the terminal board.

■ Specifications

Voltage Ue	230 V~
Current Ie	13.5 A
Contactor	KB-04, 230 V/3s~
Switching capacity	3.0 kW 230V~
Type of actuation	Mechanically on/off
Connector	Safety plug (Type F, CEE 7/4 plug, CEE 7/7 plug), 16A
Housing material	Polypropylene PP
Mounting position	Any
Protection class	IP54, splash water proof
Connection cable	1 m H07RN-F 4 G1,5
Mounting dimensions	68 x 68 mm